



THE PERFECT LENGTH PANEL FOR THE WAY YOU FRAME



Features & Benefits

- ✓ Made for Seismic Zones
- ✓ Pre-trimmed for the way YOU frame
- ✓ Simplifies 2 story construction
- ✓ Nail lines spaced at 16" o.c. & 24" o.c.

You Save Money

- ✓ No Cutting
- ✓ Eliminate Hardware
- ✓ Less Waste & Disposal
- ✓ Increase Speed

THE PERFECT LENGTH PANEL FOR THE WAY YOU FRAME

BUILD FASTER!

Match wall heights & joist depths to the perfect length panel to meet code and reduce build times

INCREASE PROFITS!


Reduce Labor
Reduce Material Costs
No Trimming
Reduce Waste and Disposal Costs

REDUCE COSTS!

Less Labor
Less Materials
Less Waste
Less Disposal


THE OLD WAY

Blocked Joints
Increased Air Leakage
More Cutting, More Waste

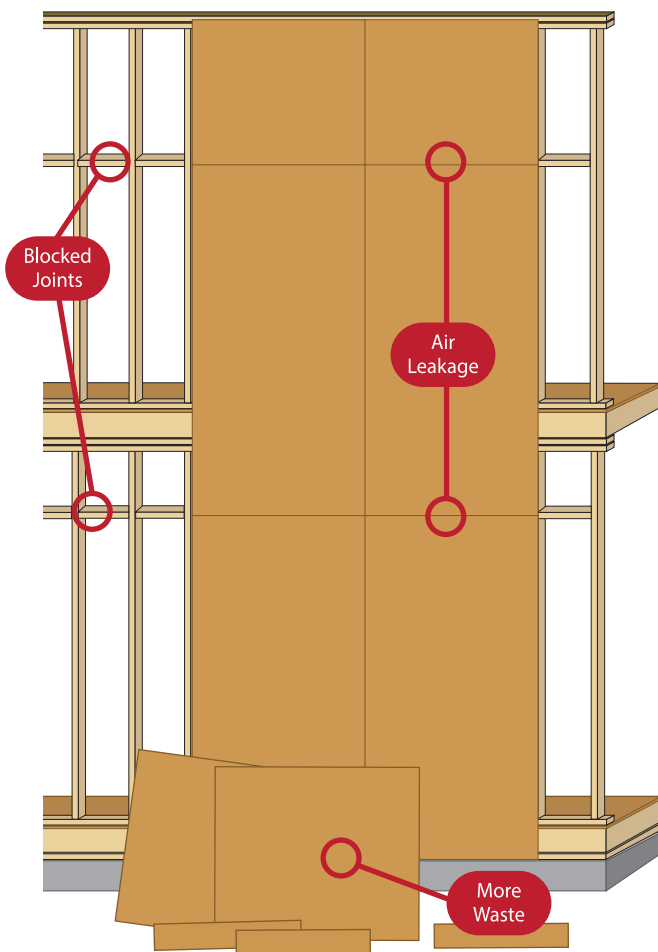

THE NEW WAY

Eliminate Blocking &
Reduce Air Leakage
No Cutting, No Waste

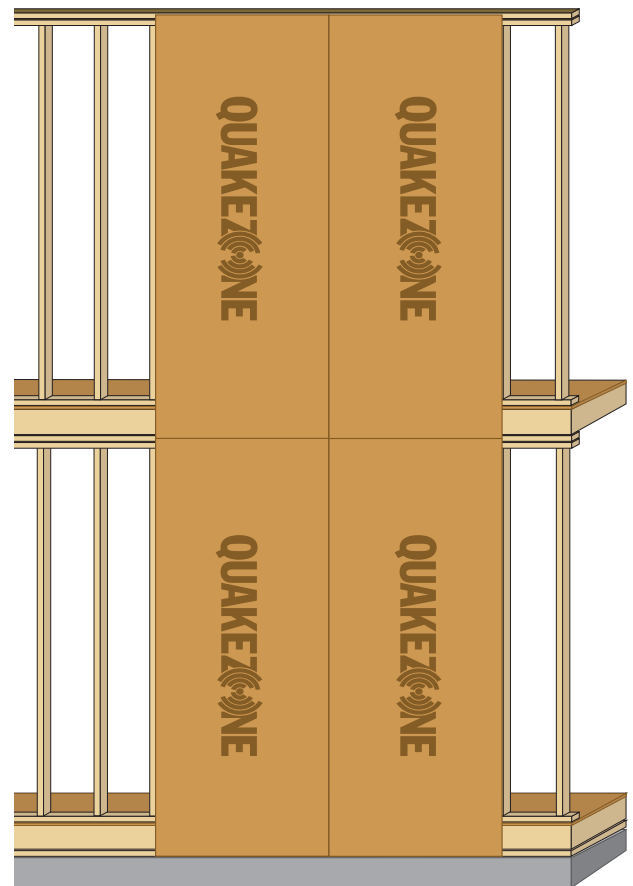

SIZES & GRADES

QuakeZone wall sheathing is available in 7/16 Performance Rated Sheathing

FOR MORE INFORMATION CONTACT
PETE.SCHIFFERS@NORBORD.COM
1-636-222-0034

QUAKEZONE
Wall Sheathing

 **Norbord**

PLATE HEIGHTS AND QUAKEZONE LENGTH SERIES⁽¹⁾⁽²⁾⁽³⁾

QuakeZone Length Series	Wall Framing Plate Height (ft-in)		
	8' 1-1/8"	9' 1-1/8"	10' 1-1/8"
QuakeZone Lengths (in)			
11-7/8" I-joists	110-7/16"	122-7/16"	134-7/16"

- (1) Other lengths and thicknesses are also available.
- (2) Minimum order quantities apply.
- (3) Sized for spacing between panels.

JUNE 2016